



BR-N150P

BCM Communication Co., Ltd.
<http://www.bcm.tw>
E-mail: sales@bcm.tw
TEL: +886-3-2504731
FAX: +886-3-3226427

3G Router *Portable* 802.11n

Compact and Portable

Within a business card size enclosure design, the tiny BR-N150P easily fits in all bags or pockets. It is really handy for mobile professionals.

Easy to Use

BR-N150P is a plug and play solution. Simply connect an activated USB data card and turn the unit on. In seconds, you are good to have a secure WiFi network.

Sharing Mobile Broadband Access

BR-N150P is tiny enough to be brought ubiquitously. All BR-N150P users will never be concerned about any inaccessible Internet access to interfere with your meeting. Sharing the Internet access with attendants in all occasions.

Cost Effective

Pricing is an important strategic issue because it is related to product positioning and sales. BR-N150P offers for a lowest price in the industry and flexibly stands on a cost vantage point in market.



3G Router Portable 802.11n

WWAN Characteristics

- . USB Port
 HSPA / HSDPA / EVDO / UMTS /
 EDGE / CDMA 1x Card / PHS

LAN Characteristics


- . Standard
 IEEE802.3, IEEE802.3u
- . Data Rate
 10/100Mbps

WLAN Characteristics

- . Standard
 IEEE802.11b/g/n 1T1R
- . Frequency Range
 2.4GHz
- . Operating Channels
 FCC:1~11
 ETSI:1~13
 Japan:1~14
- . Data Rate
 Up to 150 Mbps
- . RF Output Power
 802.11b:18dBm (± 1.5 dBm)
 802.11g:14dBm (± 1.5 dBm)
 802.11n:14dBm (± 1.5 dBm)
- . Effect Range
 Indoor:Up to 70M
 Outdoor:UP to 200~250M
- . WiFi Security
 WEP Key None/64/128bits
 WPA (personal and enterprise)
 WPA2 (personal and enterprise)

Router Characteristics

- . Feature
 DHCP Server
 DMZ Support
 IP Sharing
 MAC Access Control
 Up to 256 clients
 Multiple BSSID

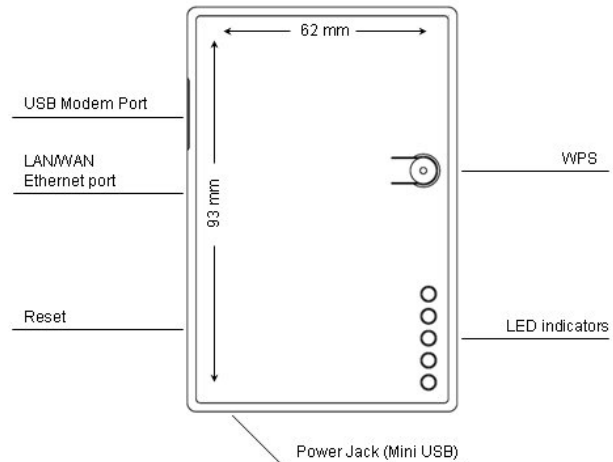

Physical Characteristics

- . Antenna
 Internal PIFA Antenna
- . Button
 WPS
 Load Default
- . Ports
 Power Jack (mini USB)
 RJ-45 Jack
 USB 2.0 Host
- . LED
 Power
 WWAN Link
 WPS Activity
 WLAN or LAN Link & Activity
 Reserve
- . Dimensions
 H:15 * W:93 * D:62mm
- . Weight
 70g

Accessories

- . USB Cable (Charging via NB, PC)
- . AC Adapter
- . Car Charger (Optional)
- . Battery Bank (Optional)

Environmental

- . Temperature
 Operating: 0~50°C
 Storage: -30~70°C
- . Humidity
 10%~95% (Non-Condensing)

Certifications

- . FCC Class B, CE